

So!



moves
to the place
of action



lifts
up to 250kg



loads
up to 80cm
high



climbs
in



drives
along!



The working tool with many advantages!

- Working methods and processes are optimized
- Resources can be used elsewhere
- Operating costs and the required time are optimized
- Health hazards for employees are reduced

- xetto® is the smart professional device for:
 - Loading and unloading
 - Transport
 - Ergonomic work on site (mobile workbench and lifting table)

- xetto® is the flexible working tool for application areas such as.:
 - Delivery service
 - Assembly
 - Service and technical support
 - Intralogistics and production
 - And many more

- Loads of up to 250 kg are handled safely and easily
- The working height can be adjusted continuously up to 106 cm
- Operation is simple and intuitive
- The investment pays off after just one year

With an average of one to two applications per week by 1 employee instead of 2 employees or more, the device is fully amortized within the first year.

xetto® is health-friendly, it helps to improve occupational safety and leads to fewer absences from work, e.g. due to back injuries.




As part of the AGR (German back health campaign) Seal of Quality test, the xetto® was evaluated by the interdisciplinary, medical test commission as follows:

"xetto® meets all defined requirements and is suitable for promoting back health. It is therefore recommended to be purchased."

xetto® enables employees to work more independently, supports and reduces their workload. They can work more easily and on their own.

xetto® is mobile, thus the payload of the vehicles can be used optimally, and the dispatch of the vehicles can be done more flexibly.

The product meets high quality standards and is CE approved.

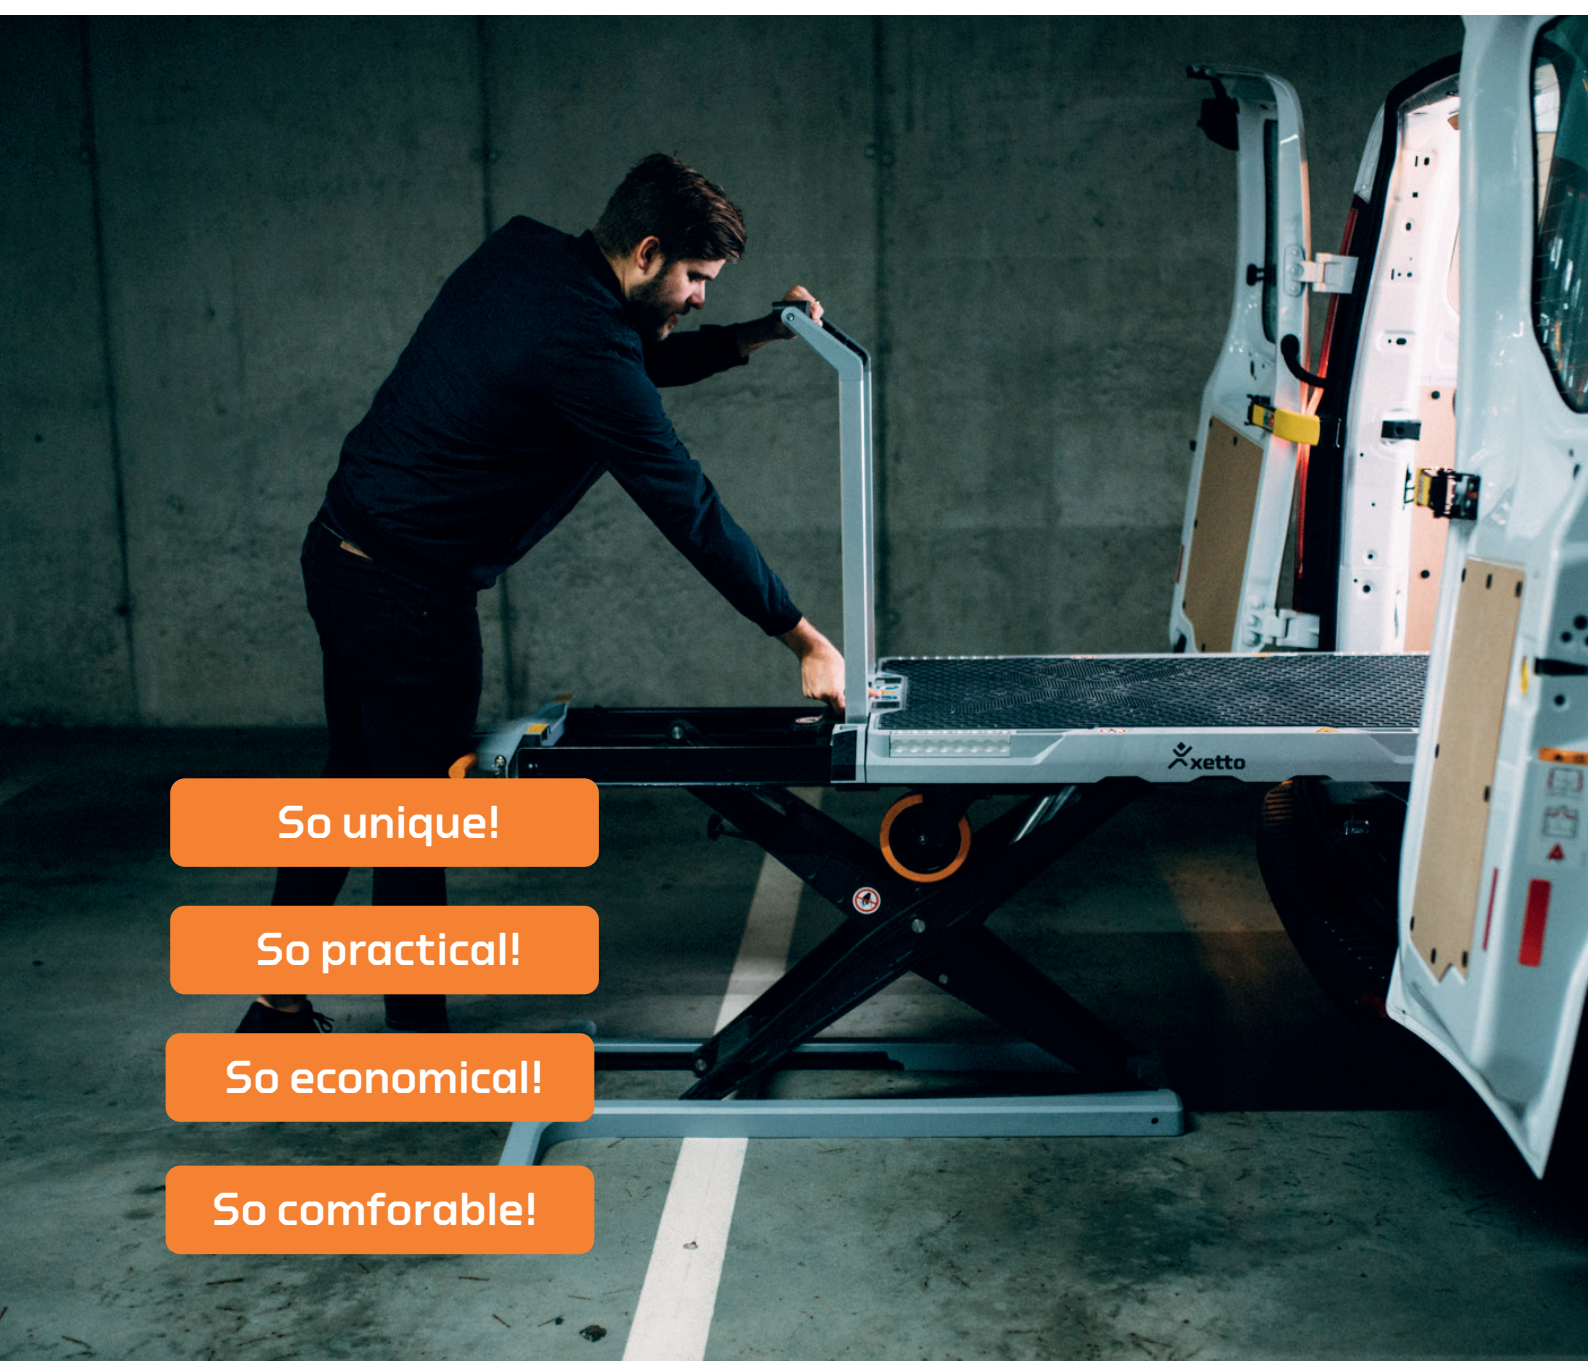


So unique!

So practical!

So economical!


So comfortable!

This is how it works!

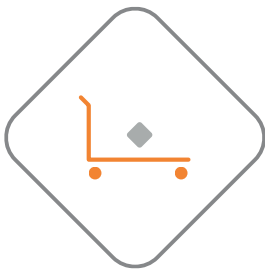

Moving

Transport goods on the **xetto**® in a handy and flexible way.

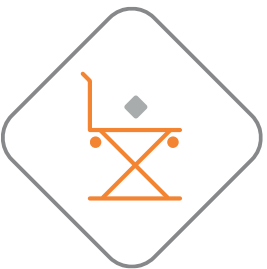

Lifting

Lift loads of 250 kg up to 106 cm just by pressing a button.




Loading and unloading

Load the goods including **xetto**® on the transport vehicle.



So!

xetto® is a transport trolley, lifting table and companion in one – developed for every area of application to move, lift, load and unload heavy weights. This unique lifting system even travels with you - So!

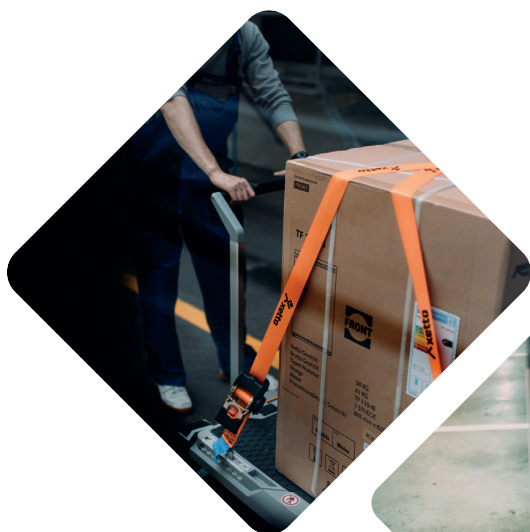


For professionals, who constantly optimise their working methods and processes. Specially developed for a modern working world, that is **xetto® - so unique.**

Load, transport or unload. Logistical versatility combined with innovative technology, that is **xetto® - so practical.**






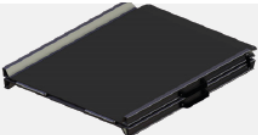
Manoeuvre loads of up to 250 kg quickly and easily. Cost-efficient and timesaving, that is **xetto® - so economical.**








The innovative loading and transport system with the comfort of a mobile worktable is easy on the back and relieves your employees, that is **xetto® - so comfortable.**



	Item	Item no. EAN-Code
	xetto® - The multipurpose system that goes wherever you go. <ul style="list-style-type: none"> Maximum load: 250 kg Lifting time: approx. 20 seconds Weight: approx. 95 kg Loading area: 1.175 mm x 800 mm Loading still height: max. 800 mm Drive unit: hydraulics, electronics Scope of delivery: xetto®, 230 V charger, Li-ion battery 14,4V / 6 Ah 	1003-0811 7649996056016

Accessories

	Additional battery - Original xetto® additional battery. <ul style="list-style-type: none"> Li-ion battery: 14,4 V/6 Ah Weight: approx. 710 g Dim.: 98 mm x 82 mm x 72 mm 	1003-0939 7649996056023
	230 V Charger - For recharging the xetto® battery using a power outlet. <ul style="list-style-type: none"> Charging voltage: 16,4 V Charging current: 2,4 A Weight: approx. 480 g Dim.: 153 mm x 86 mm x 93 mm LED charge status indicator 	1003-0940 7649996056030
	Car charger - For the 12 V socket in the vehicle. <ul style="list-style-type: none"> Charging voltage: 16,4 V Charging current: 1,6 A Weight: approx. 520 g Dim.: 153 mm x 86 mm x 93 mm LED charge status indicator 	1003-0941 7649996056047
	Airline-style cordnet -Prevents smaller parts from slipping and/or falling out of containers.³ <ul style="list-style-type: none"> Cord thickness: 3 mm / 45 mm mesh size With airline fittings for fixing Dim.: 1.000 mm x 1.400 mm Mesh breaking strength: 2000 N Compliant with VDI 2700 	1003-0942 7649996056054
	Airline-style cover - Protects cargo against moisture and dirt. <ul style="list-style-type: none"> Dim.: 1.000 mm x 1.400 mm Material thickness: 180 g/m² Waterproof, tear-resistant and washable Edges nylon-reinforced, with double border With airline fittings for fixing Colour: White 	1003-0943 7649996056061
	Foldable aluminum ramp - For loading and unloading. <ul style="list-style-type: none"> Dimensions: 915 mm wide, length folded: 974 mm, length unfolded : 1850 mm Aluminum ramp with lateral roll off protection and carrying handle Anti-slip coating 	1009-8730 7649996056153

	Item	Item no. EAN-Code
	<p>Lashing strap airline - Automatic lashing strap to ensure cargo is secured easily and safely on the xetto®.</p> <ul style="list-style-type: none"> Width: 50 mm, length: 3 m Wit airline fittings on both sides Compliant with DIN EN 12195-2 and VDI 2700 Lashing capacity LC (in straight pull) in daN: 750 Standard tension force STF in daN: 150 	<p>1003-0944 7649996056078</p>
	<p>Lashing strap airline hook - Automatic lashing strap to ensure cargo is secured easily and safely on the xetto®.</p> <ul style="list-style-type: none"> Width: 50 mm, length: 3 m Rarchet side with carabiner hook Loose side with airline fitting Compliant with DIN EN 12195-2 and VDI 2700 Lashing capacity LC (in straight pull) in daN: 750 Standard tension force STF in daN: 150 	<p>1003-0945 7649996056085</p>
	<p>Edge protection - For 50 mm strap. Equal distribution of lashing forces.</p> <ul style="list-style-type: none"> Flexible, high-quality polypropylene plastic Adapts to the shape Optimal guidance and fixing of the lashing belt Space-saving, stackable Abraison-proof Colour: Black 	<p>1003-0946 7649996056092</p>
	<p>Aluminum ramp - For loading and unloading.</p> <ul style="list-style-type: none"> Dim.: 1.189 mm x 841 mm x 122 mm Aluminum ramp with lateral roll off protection and carrying handle Slip resistant surface 	<p>1003-1412 7649996056108</p>
	<p>Loading bridge - For loading and unloading with raised loading platform.</p> <ul style="list-style-type: none"> Dim.: 804 mm x 500 mm x 47mm Material: Aluminum alloy Maximum load: 250 kg Weight: 3.7 kg 	<p>1003-9457 7649996056115</p>
	<p>Roll off protection - Prevents the load from rolling off sideways.</p> <ul style="list-style-type: none"> Dim.: 40 mm x 40 mm x 920 mm Material: Aluminum alloy Weight: 5 kg (set) 	<p>1003-2872 7649996056122</p>
	<p>Supporting foot - For a stable workbench, working height up to 1.06m.</p> <ul style="list-style-type: none"> Dim.: 95 mm x 820 mm x 60 mm Powder coated steel Fast and easily attachable to the bottom part of xetto® Compliant with DIN EN 1570-1: 5.1.3 Stability Weight: 2.7 k g 	<p>1003-9344 7649996056139</p>

A promise!

We take care of you

A product is only as valuable as its customer service. We know that. That is why regular function tests and a replacement unit during maintenance and repair are a matter of course.

You can test

Would you like to test this small miracle of logistics? We will provide you with a test device for one week. Contact us and we will deliver the **xetto**[®] directly to your door.

Test now!

www.xetto.ch +41 41 747 40 60

Xetto GmbH
Gotthardstrasse 3
5630 Muri AG

T: +41 41 747 40 60
F: +41 41 747 40 61
Email: info@xetto.ch

AGR
Aktion Gesunder Rücken e.V.



reddot design award
best of the best 2017

